

→ KCH-100HLMB

1U Rackmount Chassis for ATX Motherboard



1U for ATX Motherboard Rackmount Chassis with Front-accessible USB/PS2 Connector

Features

- Space-saving 1U high rackmount chassis
- System alarm notification by front viewable LCM Module
- Front-accessible USB and PS/2
- Power status indicator by front viewable Led indicator
- Support an ATX Motherboard (12"x9.6") and one 32-bit PCI riser card
- Easy installation disk drive bay to hold one slim CD-ROM, one 3.5" FDD and one internal 3.5 HDD or 2 internal 2.5" HDD
- Streamlined & efficient cooling design with 2 fans in the left side

Specification

- Disk Drive Bay: 3.5"FDDx1, 3.5"HDDx1 or 2.5"HDDx2(internal), slim CD-ROMx1.
- Cooling Fan: 2x(40x40x20mm) cooling fan in the left side.
- I/O interface: 2 x USB, 1 x PS/2 (front-accessible)
- Power: 250 W ATX power supply
- Dimension: (WxHxD) 430x44.4x450
- I/O BKT special design by different MB

Environmental

- Operating temperature: 0°C to 40°C (32°F~ 104°F)
- Storage temperature: -40°C to 60°C (-40°F~ 140°F)
- Storage humidity: 10% to 95%@ 40°C, non-condensing
- Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G
- Shock: 30G peak acceleration (11 msec. duration)




ANNSO TECHNOLOGY CO., LTD

Factory address: Hexi District of JinXia, Chang'an Town, Dongguan City, Guangdong, China.
Tel: +86-769-5387700 5387755 5305389 5305396 5531482 5530279 Fax: +86-769-5329662



Dimension Diagram

Unit:mm

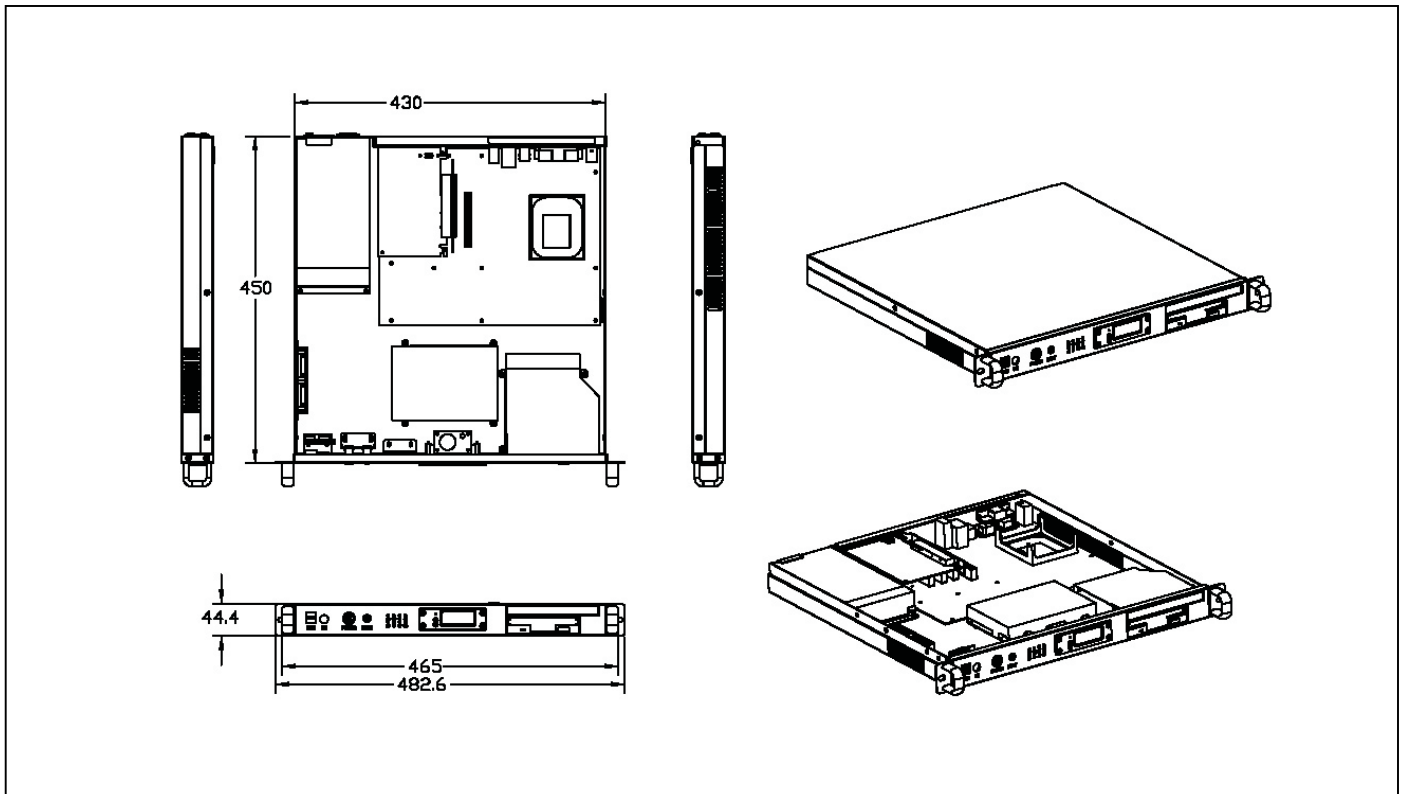

Ordering Information

KCH-100HLMB 1U 19" Rackmount Chassis, w/o Power Supply, w/o Motherboard

KCH-100HLMB-250X 1U 19" Rackmount Chassis, w/250W ATX Power Supply,w/o Motherboard