

Features

- 10.4" SVGA TFT LCD Panel support 800x600 pixels
- Open frame structure with strengthen glass
- Rugged construction and modularized design
- Input signal : VGA + DVI + Audio
- 400 cd/m2 brightness
- OSD control keys to optimize the display
- Build in 2x 2 Watts stereo speaker
- AC 100-240V wide range external ac adapter
- Panel mounting with clip
- Meet standard VESA hole (75x75 and 100x100 mm), support desk top stand / wall mount / swing arm mounting

Optional

- Video input (S-Video , Composite , BNC input)
- DC power input (8 -30V dc input)
- Touch Screen

Specifications

LCD Panel	Display Type : 10.4" SVGA TFT LCD Resolution : 800 × 600 Max. color : 262K Luminance : 400 cd/m2 View Angel : 100°(H) , 120°(V) Pixel Pitch : 0.264 x 0.264 mm Contrast Ratio : 500 : 1 Response Time : 25 ms Power Consumption : 8.3 W LCD MTBF : 50,000hrs
Signal input	VGA (15 pin D-sub connector)+ DVI (DVI-D connector) + audio input (audio jack)
Protect glass	3 mm strengthen glass
Speaker	Built-in 2x stereo speakers(2w)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Touch Screen (optional)	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 98 / 2000 / ME / XP / NT / CE, DOS , Linux
Signal connectivity (optional)	AV input (S-Video ,RCA ,BNC)
DC power input (optional)	Wide range DC 8V-30V input
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A/48W ,external ac adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: 0 °C to 50 °C


IPMBX-10-M1

	Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 90%non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec)
Safety	CE/FCC/RoHS
Dimension W x H x D (mm)	280 x 230 x 45.8
Weight (kg)	Net: 2.8 Gross: 4.8

Ordering Information

VGA + DVI Input	
IPMBX-10-M1	10.4" Industrial Open Frame Flat Panel Monitor with VGA + DVI input
IPMBX-10-M1RTU	10.4" Industrial Open Frame Flat Panel Monitor with VGA + DVI input, with touch screen and USB controller
IPMBX-10-M1RTC	10.4" Industrial Open Frame Flat Panel Monitor with VGA + DVI input ,with touch screen and RS-232 controller
AV Input	
IPMBX-10-M1A	10.4" Industrial Open Frame Flat Panel Monitor with VGA + DVI + S-Video + AV + BNC input
IPMBX-10-M1ARTU	10.4" Industrial Open Frame Flat Panel Monitor with VGA + DVI + S-Video + AV + BNC input, with touch screen and USB controller
IPMBX-10-M1ARTC	10.4" Industrial Open Frame Flat Panel Monitor with VGA+ DVI + S-Video + AV + BNC input, with touch screen and RS-232 controller
DC-PW	DC 8V-30V input power module

Dimension Diagram

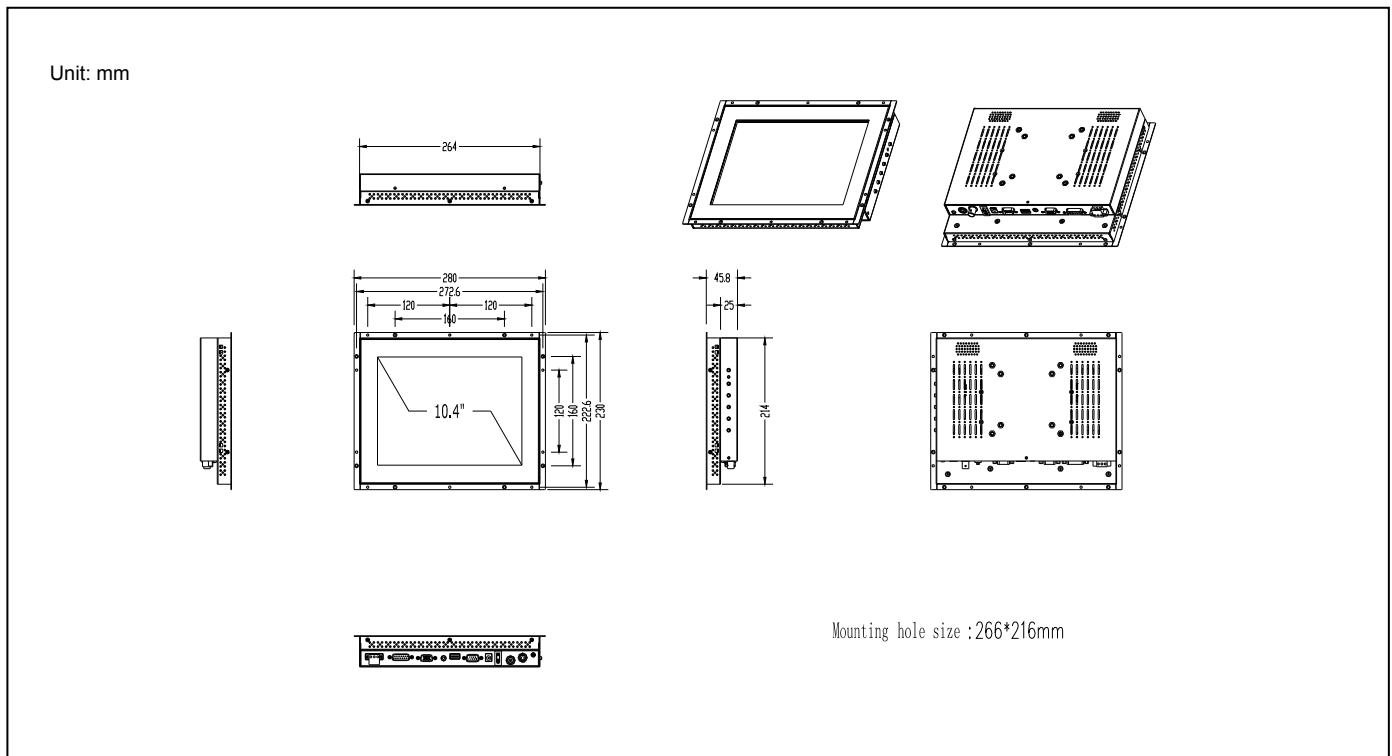

Annso Technology Co.,Ltd

Factory address: The south faces industry area of Xia Gan Fu Hai road, Chang'an Town, Dongguan City, Guangdong, China.

Tel: +86-769-81666360 81666395/96/97

Fax: +86-769-81666306

Web: www.annso.com www.annso.com.cn

Email: Sales@annso.com.cn

