



## Features

- Onboard VIA C3 Processor 1G with 128KB Level 1 and 64KB Level 2 Cache with FSB 100/133MHz EBGA Package
- 15" XGA TFT LCD
- Support 1024x768 resolution
- Resistive Touch screen (optional)
- 2-slot PCI extension
- NEMA 4/ IP-65 compliant ( front panel )

## System

- Onboard VIA C3 Processor 1G with 128KB Level 1 and 64KB Level 2 Cache with FSB 100/133MHz EBGA Package
- System Memory: One DIMM socket accepts up to 512MB SDRAM
- System Fan: 2\* (60x60x10mm) cooling fan
- Speaker: 2\* 2W Stereo Speaker
- OSD : Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
- Construction: Heavy duty steel & Aluminum (Front panel)
- RS-232 x 3 , RS-232/422/485 x 1
- Parallel port x 1
- USB x 4 with 1.1 compliant
- Keyboard X 1, Mouse X 1
- Stereo audio x1 ( Mic-in, Line-in and Line-out )
- Ethernet x 1 (10/100 Base-T) with RJ 45 connector
- Dimensions:  
(WxHxD) :402mm\*302mm\*126.5mm
- Packing Dimension:492x395x257mm
- NET weight:11.2KG
- Gross weight:12.5KG

## Environmental

- Operating temperature: 0°C to 50°C
- Storage temperature: -20°C to 60°C
- Storage humidity: 10% to 90%non-condensing
- Vibration: 17 to 500HZ 1G PTP
- Shock: 1G/peak(11m sec)
- Front panel protection: meet

## Power Supply

- INPUT: 115~230 VAC,50/60Hz
- OUTPUT: ATX200W with PFC +5V@12A, +12V@10A

## Mounting

- Wall-mount/Desktop stand/swing arm
- Meets standard VESA (75/100mm)

## Storage


- Interchangeable slim optical drive
- 2.5" ATA / SATA high Capacity HDD (horizontal)

## LCD

Display Type:	15" TFT LCD
Max.Resolution:	1024x 768
Display. Colors:	16.7M colors
Light Luminance:	250 cd/m <sup>2</sup>
Backlight MTBF:	50,000 hrs
Pixel Pitch:	0.297mm
Contrast Ratio:	450 : 1
Power consumption:	9.5W

## Dimension Diagram

Unit:mm

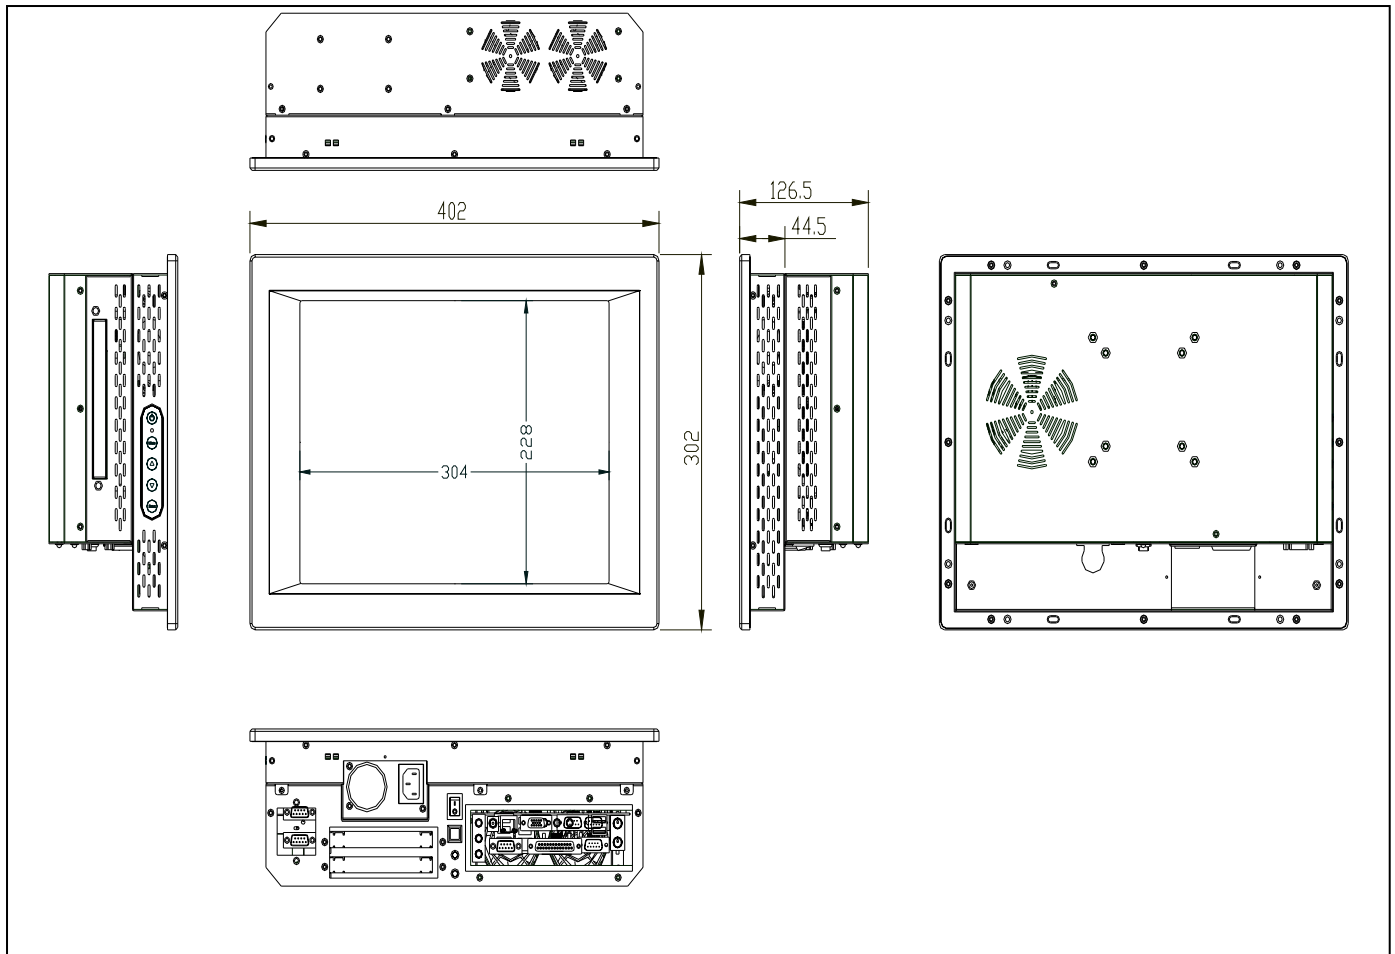

## Ordering Information

- |                   |   |
|-------------------|---|
| <b>IPPC-9150</b>  | 15" VIA C3 1G Panel PC with 200W power supply.                    |
| <b>IPPC-9150T</b> | 15" VIA C3 1G Panel PC with Touch screen, with 200W power supply. |