

1+1 Console 8/16/32 Port Cat5 Combo 15" LCD KVM


KVM-15ASL

Feature

- ✧ Build-in Combo CAT5 KVM with either 8,16 or 32 ports
- ✧ Support an optional remote console (Cat5 based or Over-IP)
- ✧ 104 keys keyboard with touchpad.
- ✧ VGA-USB / VGA-PS2 connector dongle up to 40 meters (132 feet) Cat5 cable
- ✧ Cascade switches up to 8 levels and Mix switches between Cat5 & DB-15 KVM
- ✧ Support DOS, Windows, Netware, Unix, Linux, Mac OS.
- ✧ Hot Pluggable – Add or remove connected PCs without having to power down the KVM switch or PCs.
- ✧ Superior video quality - Up To 1280 X 1024 , DDC2B
- ✧ No software required - easy PC selection via Push Buttons, Hot Keys or OSD (on screen display).
- ✧ Auto Scan Mode for monitoring PCs
- ✧ Firmware upgradeable for staying compatible with new coming computers
- ✧ Metal case, rack mountable Support DDC2B for all ports



Diagram

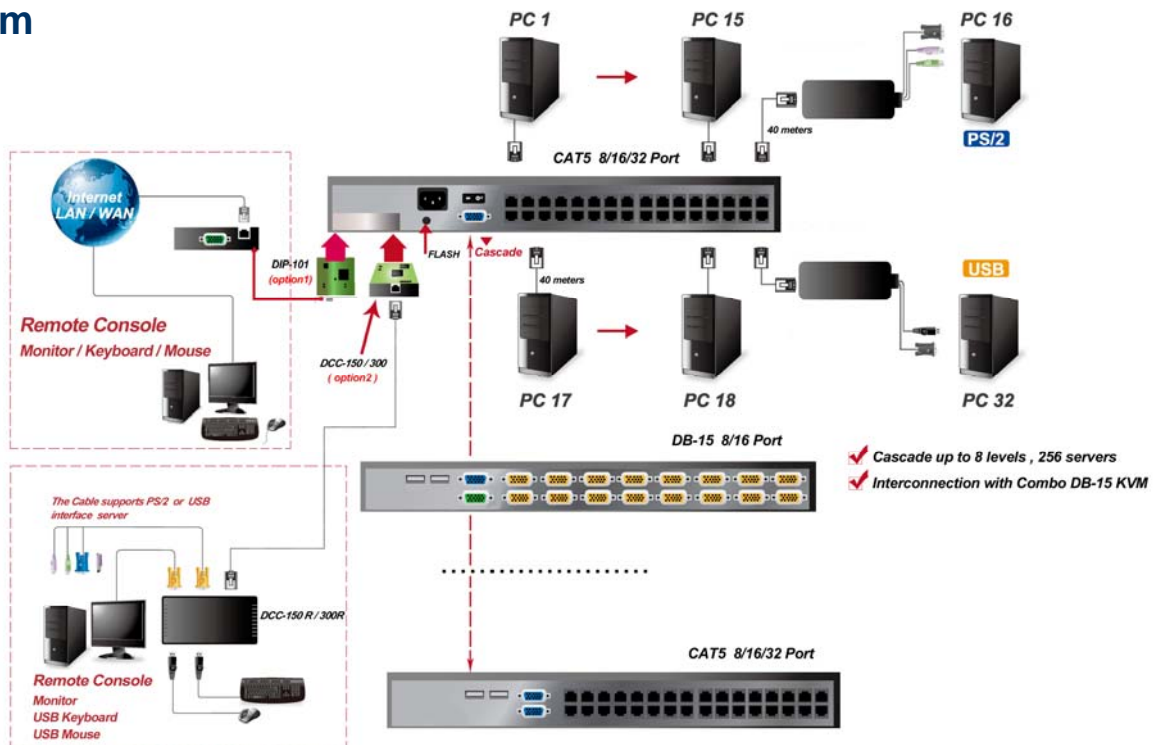

Specifications

Function		KVM-1508ASL	KVM-1516ASL	KVM-1532ASL
LCD	Size	15 " TFT		
	Resolution	1024 x 768		
	Max. color	16.2M		
	Luminance	250 cd/m2		
	View Angel	150°(H) , 135°(V)		
	Pixel Pitch	0.297 x 0.297 mm		
	Contrast Ratio	700 : 1		

1+1 Console 8/16/32 Port *Cat5* Combo15" LCD KVM

KVM-15ASL

LEDs / Port	8	16	32
Power	1		
Computer Connections	8	16	32
Maximum Computer Connections	232	240	256
Computer Connectors	RJ-45 Connector		
Console Ports	1 (One Local), plus 1Optional Modules : Selectable CAT5-Based or IP Remote Console		
CAT5-Based Remote Console (DCC-150/300)	1 x RJ-45 connector up to 300 Meters (1000 feet) with CAT5 cable; Remote receiver support 1 x VGA (up to 1280x1024 resolution) 2 x USB for KB & Mouse , 1 x KVM port for connecting an extra PC		
IP-Based Remote Console Module (DIP-101)	1 x RJ-45 connector for 10/100M Ethernet (remote console up to 1600x1200 resolution), 1 x DB-9 male connector for Modem ,Null Modem and serial power control ,1 x mini USB 2.0 receptacle		
Daisy Chaining	Daisy Chainable up to 8 levels ; Connector : DB-15 (female type)		
Computer Selection	On Screen Display (OSD) , Hot Key , Push Button		
Hotkey	Provide various Hotkey (Scroll-Lock/ Cap-Lock / Num-Lock / Alt-Ctrl-Win)		
Auto-Scan Intervals	5 ~ 99 Sec.		
Keyboard / mouse Emulation	PS/2		
Video Resolution (Local Console)	1024 x 768 for 15" , 1280 x 1024 for 17" and 19"		
Video Resolution (Remote Console)	1280x1024 for CAT5-Based 500 feet remote console ; 1024 x 768 for CAT5-Based 1000 feet remote console ; 1600 x 1200 for IP-Based remote console		
Power Adapter	AC 100-240V , 50/60Hz , DC 12V / 4A , 48w via IEC type cord		
Housing	Metal		
Size	19" Rack mount , 1U		
Net / Gross Weight (KG)	14kg / 19kg	14.5kg/ 19.5kg	15kg/20kg
Physical Dimensions (W x H x D)	448 x 42 x 580 (mm)		
Packing Dimensions (W x H x D)	580 x 200 x 790 (mm)		
Operating Temperature	0 °C to 50 °C		
Storage Temperature	-20°C to 60°C		
Humidity	10% to 90%,non-condensing		
Certificated	CE/FCC		

1+1 Console 8/16/32 Port Cat5 Combo 15" LCD KVM

KVM-15ASL

Order Information

KVM-1508ASL	1U Rack mount 15" TFT LCD W / 8 port Cat5 KVM switch , W/ 48 W power supply
KVM-1516ASL	1U Rack mount 15" TFT LCD W / 16 port Cat5 KVM switch , W / 48 W power supply
KVM-1532ASL	1U Rack mount 15" TFT LCD W / 32 port Cat5 KVM switch , W / 48 W power supply
OMI-KIT	One man installation kit

Dimension Diagram

