


RM-2x6

19" Rack Mount Two 6.4" TFT LCD Monitor

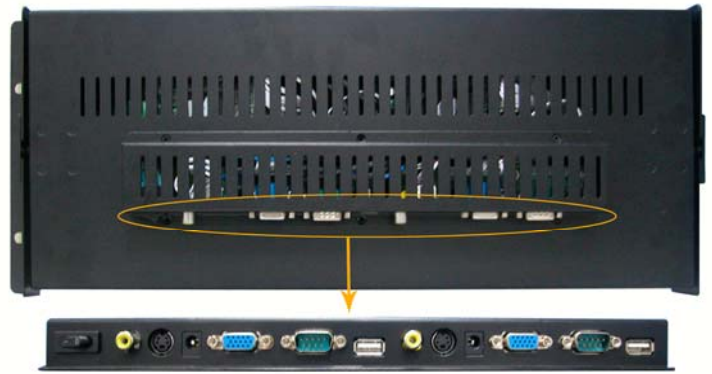

System

- Compact 19" Rack mount TFT LCD monitor, 3.5U High
- Construction: Heavy duty steel chassis
- Input signal: VGA , Video, S-Video
- Control: Front panel OSD Control
- Power Supply: External 48W DC 12V power adapter
- OS Support: MS DOS, Windows 98/SE, Windows NT4.0, Windows 2000, Windows XP
- Video Source: NTSC/Pal and detect
- Input per panel(total):1(2)composite,1(2)S-Video
- 90° tilt adjustment while mounted in rack:+45° ~-45° (V)
- Dimensions (W x H x D):482.6*153.6*62.6 mm
- Packing Dimension:600x190x 320mm
- NET weight: 5.4KG
- Gross weight: 6.5KG
- Signal Connector: 15 Pin mini D-SUB,Video,S-Video connector
- Function Control: Power Switch, Menu, Select (+,-), Enter
- OSD: Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
- Touch screen (optional)



LCD

- Display Type: 6.4" VGA TFT LCD
- Screen resolution (Pixels): 640*480
- Brightness: 400 nits
- Contrast Ratio: 400: 1
- Pixel Size: 0.2025*0.203
- Maximun Color: 262K
- Viewing angle (L/R ,U/D): 50/50 ,15/35
- Response Time: 40 ms
- Power Consumption: 4.8 Watts
- MTBF: 20,000 hrs.

Touchscreen(optional)

- Internal USB or RS-232 interface controller
- Type: Analog resistive type : 25VDC ≥ 20MΩ
- Resolution: continuous
- Light transmission: 80% or more
- Power consumption:<5V @1mA
- Surface hardness : 3H
- Operating force : ≤100g
- Life expectancy : 35 Million
- Operation system : Window 98 / 2000 / ME / XP / NT / CE, DOS , Linux

Environmental

- Operating temperature: 0°C to 45°C (32°F~113°F)
- Storage temperature: -20°C to 60°C (-4°F~140°F)
- Storage humidity: 10% to 95%@ 40°C ,non-condensing,
- Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G
- Shock: 30G peak acceleration (11 msec. duration)


Annso Technology Co.,Ltd

Factory address: The south faces industry area of Xia Gang Fu Hai road, Chang'an Town, Dongguan City, Guangdong, China.
Tel: +86-769-81666360 81666395/96/97

Fax: +86-769-81666306



Dimension Diagram

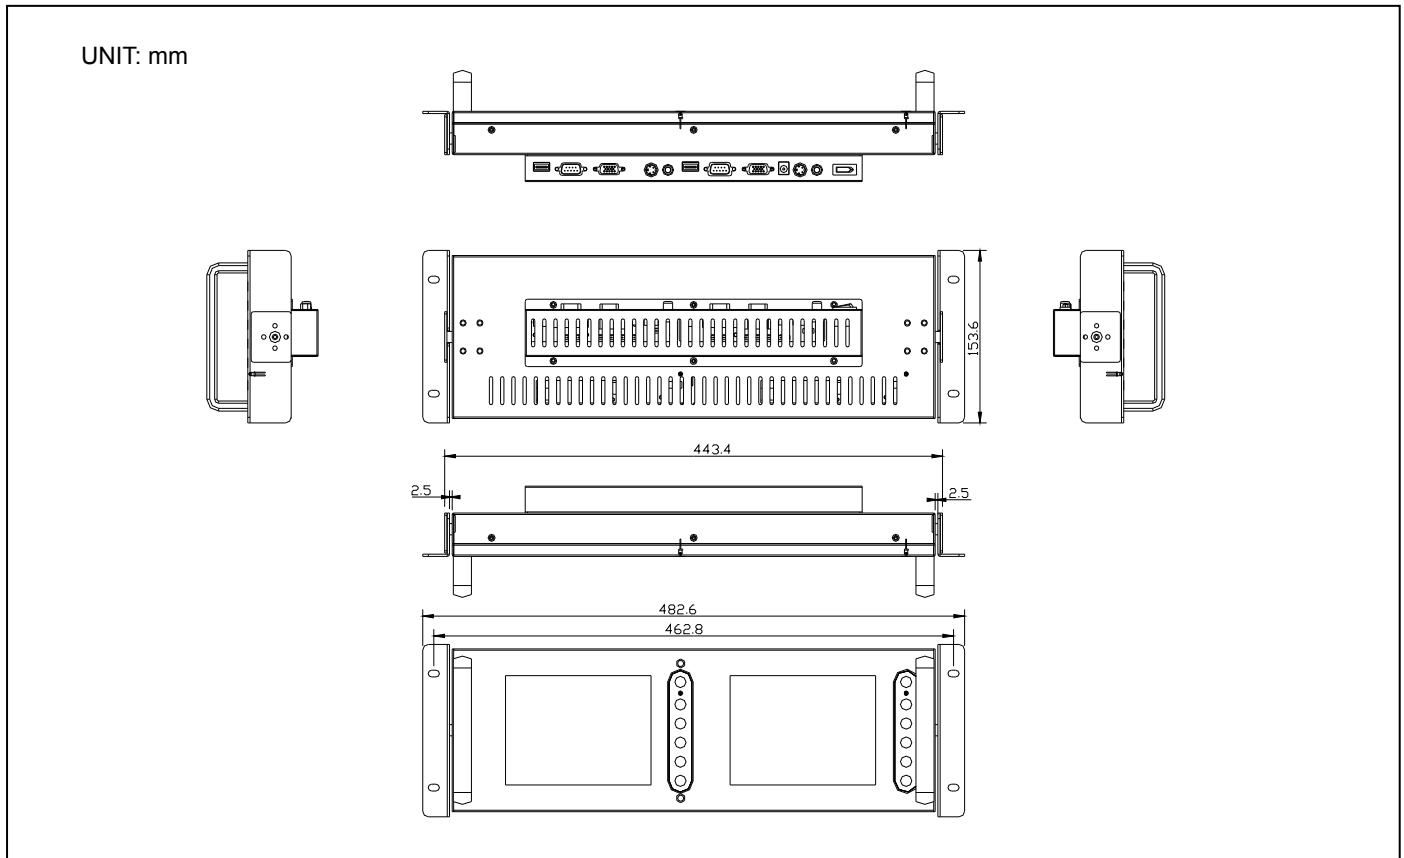

Ordering Information

RM-2X6	Two 6.4" TFT LCD, 48W DC 12V Power Adapter
RM-2X6T	Two 6.4" TFT LCD, Resistive Touchscreen, 48W DC 12V Power Adapter