

→ KCH-201HLMB

2U Rackmount Chassis for ATX MB



2U ATX Motherboard Rackmount Chassis Front-accessible USB/PS2 Connector

Features

- Compact 2U high Rackmount chassis, ideal building block for business expansion
- Shock-resistant disk drive Bay to holds one slim CD-ROM and two 3.5" disk drivers Accessible from the front door and Two internal 3.5"HDD driver Bay
- Support ATX MB (9.6"x12") foam factor.
- Flexible mechanical design supports 300W ATX PFC PS/2 power supply
- One riser card supports Three PCI expansion card
- Power status indicator by front viewable Led indicator
- System alarm notification and Front LCM Display for Temperature setting

Specification

- Disk Drive Bay: 3.5"FDDx1, 3.5"HDDx1 (internal), slim CD-ROMx1. additional 2x3.5"HDD space (internal)
- Cooling Fan: 1x(70x70x15mm) cooling fan with air filter in front side, 1x(70 x70 x15mm) in rear side
- I/O interface: 2 x USB (front-accessible), 1 x PS/2 keyboard(front-accessible)
- Dimension: (WxHxD) 426.5x88.4 x455.5

Environmental

- Operating temperature: 0°C to 40°C (32°F~ 104°F)
- Storage temperature: -40°C to 60°C (-40°F~ 140°F)
- Storage humidity: 10% to 95% @ 40°C, non-condensing
- Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G
- Shock: 30G peak acceleration (11 msec. duration)




ANNSO TECHNOLOGY CO., LTD

Factory address: Hexi District of JinXia, Chang'an Town, Dongguan City, Guangdong, China.
Tel: +86-769-5387700 5387755 5305389 5305396 5531482 5530279 Fax: +86-769-5329662



Dimension Diagram

Unit:mm

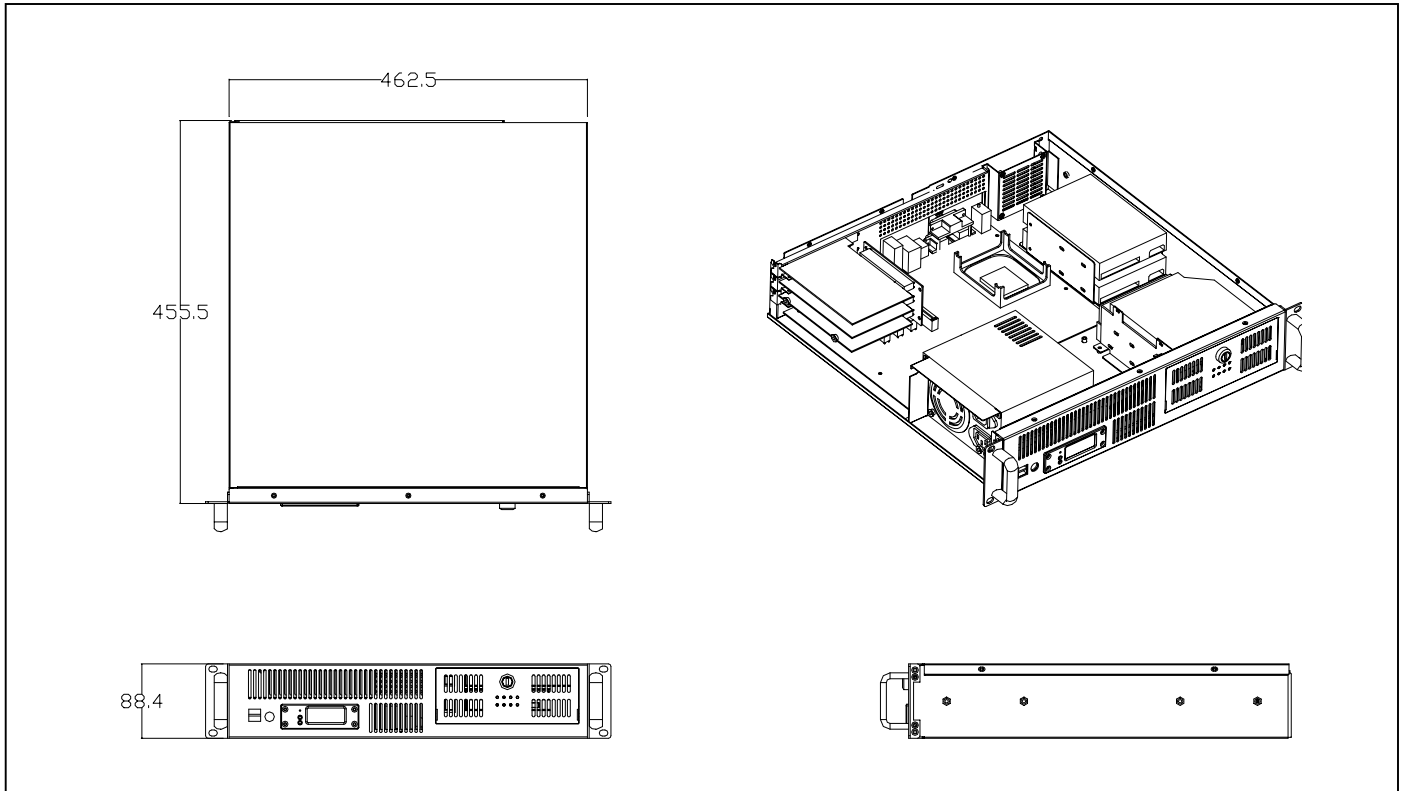

Ordering Information

KCH-201HLMB	2U 19" Rackmount Server Chassis, w/o P/S,
KCH-201HLMB-250X	2U 19" Rackmount Server Chassis, w/250W ATX power supply
KCH-201HLMB-300X	2U 19" Rackmount Server Chassis, w/300W ATX power supply