

→ KCH-201HL

2U 6-Slot Rackmount Chassis



2U 6-slot Rackmount chassis Front-accessible USB/PS2 Connector

Features

- Compact 2U high Rackmount chassis, ideal building block for business expansion
- Shock-resistant disk drive Bay to holds one slim CD-ROM and two 3.5" disk drivers for data mirroring applications
- Butterfly backplane design supports up to 4-slot PCI expansion
- Flexible mechanical design supports 300W ATX PFC PS/2 power supply and 300W ATX PFC redundant power supply
- Special modular design allows users to maintain the system with minimum downtime
- Power status indicator by front viewable Led indicator
- System alarm notification and Front LCM Display for Temperature setting

Specification

- Disk Drive Bay: 3.5"FDDx1, 3.5"HDDx1 (internal), slim CD-ROMx1. additional 1x3.5"HDD space when use STD PS2 power supply
- Cooling Fan: 2x(80x80x25mm) cooling fan with air filter.
- I/O interface: 2 x USB(front-accessible), 1 x PS/2 (keyboard x 1, front-accessible)
- Dimension: (WxHxD) 482.6x88.4 x451.7

Backplane

CBP-6VI
CBP-6VP2
CBP-6VP3
CBP-6VP3-ATX
CBP-6VP4

Power supply options

250W AC ATX power supply
300W AC ATX Redundant power supply
300W AC AT power supply
300W AC ATX power supply
300W DC -48 V power supply

Environmental

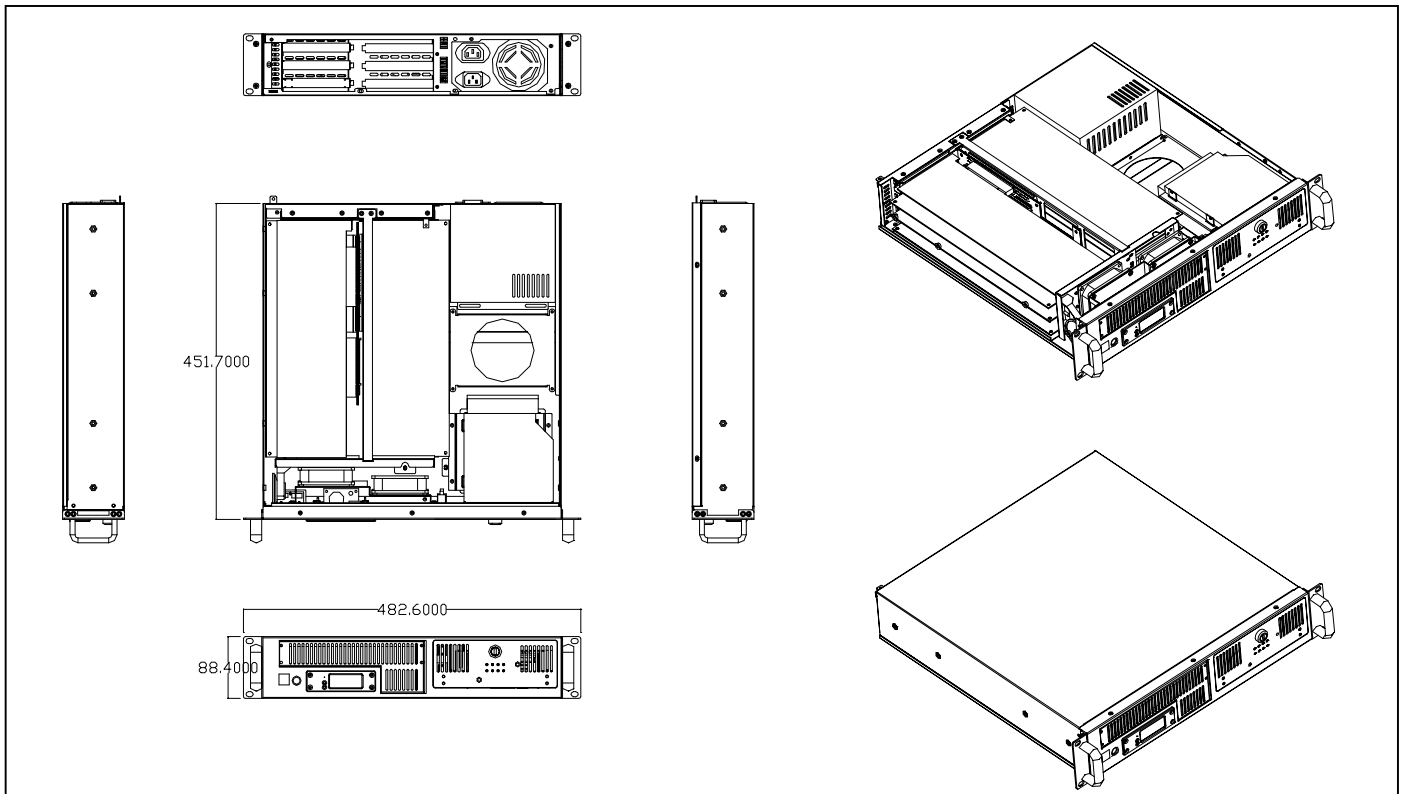
- Operating temperature: 0°C to 40°C (32°F~ 104°F)
- Storage temperature: -40°C to 60°C (-40°F~ 140°F)
- Storage humidity: 10% to 95% @ 40°C, non-condensing
- Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G
- Shock: 30G peak acceleration (11 msec. duration)

ANNSO TECHNOLOGY CO., LTD

Factory address: Hexi District of JinXia, Chang'an Town, Dongguan City, Guangdong, China.
Tel: +86-769-5387700 5387755 5305389 5305396 5531482 5530279 Fax: +86-769-5329662



Unit:mm

Dimension Diagram**Ordering Information**

KCH-200HLBP-250X	2U 19" Rackmount Server Chassis, w/ 250W ATX P/S,w/o Backplane
KCH-200HLI-250X	2U 19" Rackmount Server Chassis, w/ 250W ATX P/S, w/ CBP-6VI Backplane
KCH-200HLP2-250X	2U 19" Rackmount Server Chassis, w/ 250W ATX P/S, w/ CBP-6VP2Backplane
KCH-200HLP3-250X	2U 19" Rackmount Server Chassis, w/ 250W ATX P/S, w/ CBP-6VP3 Backplane
KCH-200HLP4-250X	2U 19" Rackmount Server Chassis, w/ 250W ATX P/S, w/ CBP-6VP4 Backplane